




TOUGH WORLD. TOUGH EQUIPMENT.

TOUGH WORLD. TOUGH EQUIPMENT.

CIH (Malaysia) Sdn Bhd
No. 2B, Jalan PP 2/2, Taman Putra Prima, 47100
Puchong, Selangor Darul Ehsan
E: forklift@cih-malaysia.com
T: +6011 6225 5118
W: forklift.cih-malaysia.com
Specifications and designs are subject to change
without notice. Machines shown may include
optional equipment.

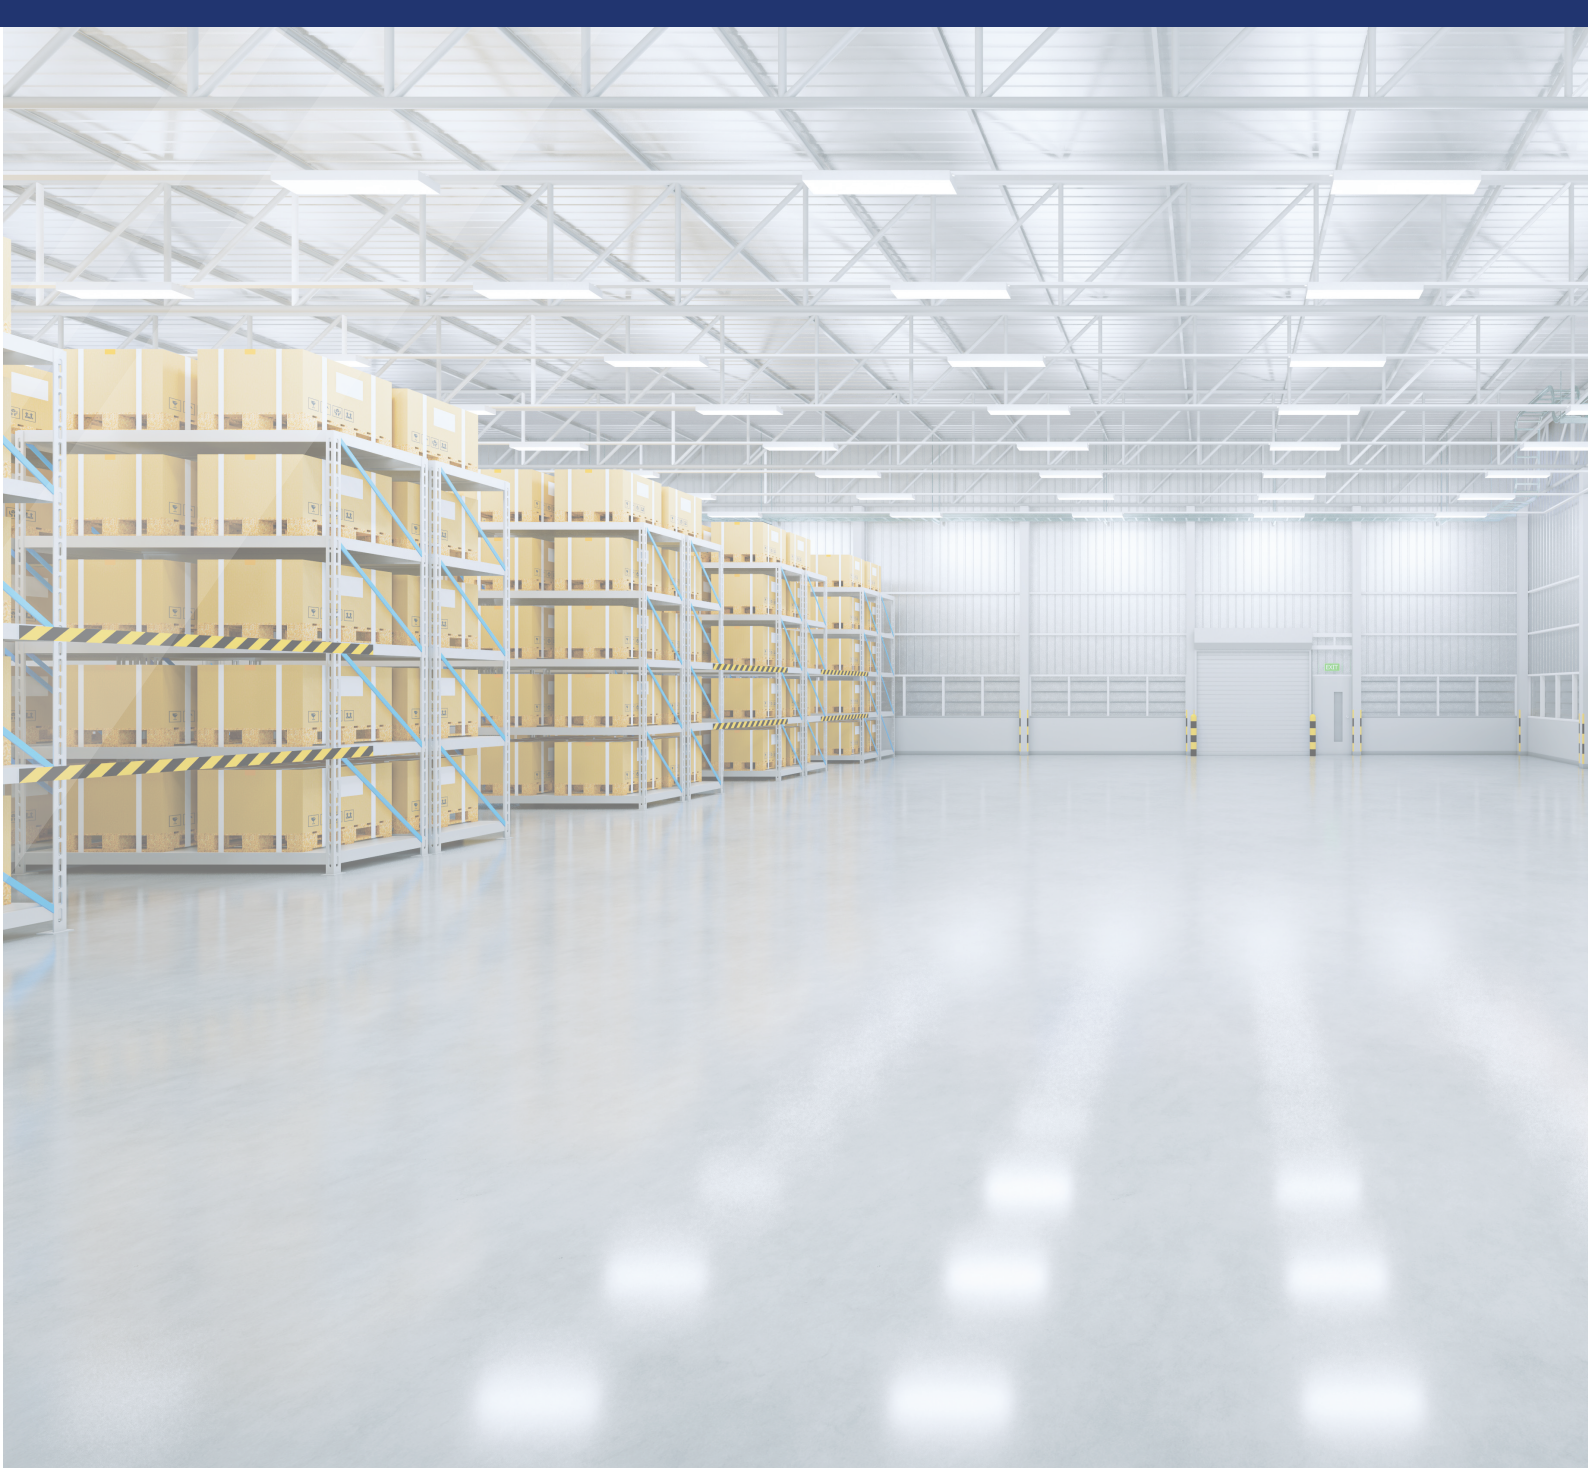

Website



Whatsapp

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.



E-SERIES CPD30/35-EJL

Lithium Battery Counter-balanced Forklifts

TOUGH WORLD. TOUGH EQUIPMENT.

CPD30/35-EJL SPECIFICATION

Weight

Performance

	Model		1		CPD30-EJL		CPD35-EJL	
	Type of engine		2		Electric		Electric	
	Rated Lifting Capacity		3		3000		3500	
	Load center		4		500		500	
	Dead Weight		5		4160		4490	
	Axle load		6		6498/1836		7246/1787	
	Axle load		7		742/2404		818/2777	
Tire	Type of tire		8		Pneumatic tire		Pneumatic tire	
	Tires number		9		2/2		2/2	
	Wheelbase		10		1760		1760	
	Tire Size		11		28×9-15-14PR		28×9-15-14PR	
	Tire Size		12		6.5-10-10PR		6.5-10-10PR	
Mast	Track (thread)		13		1005/980		1005/980	
	Lift height		14		std 2-Stage mast		std 2-Stage mast	
	Free lift		15		std 2-Stage mast		std 2-Stage mast	
	Height, mast lowered		16		std 2-Stage mast		std 2-Stage mast	
	Height, mast extended		17		std 2-Stage mast		std 2-Stage mast	
	Mast tilt, fwd/back		18		std 2-Stage mast		std 2-Stage mast	
	Fork carriage		19		Width		Width	
	Fork spread		20		Min/Max		Min/Max	
	Fork dimensions		21		T x W x L		T x W x L	
	Overall Length (to the front end of the fork)		22		std 2-Stage mast		std 2-Stage mast	
Chassis	Overall width		23		mm		mm	
	Overhead guard height		24		mm		mm	
	Minimum Turning Radius		25		mm		mm	
	Travel speed		26		Full load/unloaded		Full load/unloaded	
	Lift speed		27		Full load/unloaded		Full load/unloaded	
	Lower speed		28		Full load/unloaded		Full load/unloaded	
	Ground clearance		29		central chassis		central chassis	
	Maximum Gradeability		30		5-minute working system		5-minute working system	
	electric-control		31		Travel /Work Pump		Travel /Work Pump	
	Motor		32		Drive motor power		Drive motor power	
System	Battery		33		Work pump motor power		Work pump motor power	
			34		Types		Types	
			35		Voltage		Voltage	
			36		Capacity (5h)		Capacity (5h)	

